



PMC[®]

STUDIO

MONITORS THAT MAKE BETTER MUSIC



made in UK

TARIFA

ATCONSUMER VALUE RETAIL

Importador exclusivo para España, Portugal y Argentina

✉ info@atconsumer.es

☎ +34 609 288 310

🌐 atconsumer.es

Professional active monitors – nearfield

EURO RETAIL INC VAT 06/20

PMC[®]



result6

Active two way monitor

€ Retail
Inc. VAT

Pair

Consultar



Result6

El **result6** incorpora las prestaciones de la tecnología ATL[™], el sistema de carga de graves patentado en el corazón de todos nuestros diseños. Este monitor activo de referencia bidireccional ofrece todas las prestaciones por las que PMC es reconocida mundialmente: alta resolución y detalle, bajos precisos y amplios, equilibrio tonal constante en todos los niveles y amplia dispersión y punto óptimo.

INFORMACIÓN Y ESPECIFICACIONES


<https://pmc-speakers.com/products/professional/active/result6>



Professional active monitors - midfield & main

EURO RETAIL INC VAT 06/20

PMC[®]




QB1 XBD-A

3 way soffit mount speakers in studio black finish
(2 x PMC control1200, 8 x PMC power2400, RC2 remote)

Pair

€ Retail
Inc. VAT

Consultar




QB1-A

3 way soffit mount speakers in studio black finish
(2 x PMC control1200, 4 x PMC power2400, RC2 remote)

Pair

Consultar



BB6S XBD-A

3 way floorstander speaker in studio black finish
(2 x PMC control1200, 4 x PMC power2400, RC2 remote)

Pair


Consultar

BB6S XBD-A-C

Dedicated 3 way centre channel speaker for the BB6 XBD-A
(1 x PMC control1200, 2 x PMC power2400)

Each

Consultar



BB6S-A

3 way standmount in studio black finish
(2 x PMC control1200, 2 x PMC power2400, RC2 remote)

Pair

Consultar


BB6S-A-C

Dedicated 3 way centre channel speaker for the BB6-A
(1 x PMC control1200, 1 x PMC power2400)

Each

Consultar

06/2020 EURO RETAIL INC VAT



MB3S XBD-A

3 way floorstander speaker in studio black finish
(2 x PMC control1200, 2 x PMC power2400, RC2 remote)

Pair

€ Retail
Inc. VAT


Consultar

MB3S XBD-A-C

3 way floorstander speaker in studio black finish
(1 x PMC control1200, 1 x PMC power2400)

Each

Consultar



MB3S-A

3 way standmount in studio black finish
(2 x PMC control1200, 2 x PMC power2400, RC2 remote)

Pair


Consultar

MB3S-A-C

Dedicated 3 way centre channel speaker for the MB3-A
(1 x PMC control1200, 1 x PMC power2400)

Each

Consultar



IB2S XBD-AII

3 way floorstander speaker in studio black finish
(2 x PMC control1200, 2 x power2400, RC2 remote)

Pair

Consultar

IB2S XBD-A-CII

3 way floorstander speaker in studio black finish
(1 x PMC control1200, 1 x power2400)

Each

Consultar

IB2S-AII

3 way standmount in studio black finish
(2 x PMC control1200, 2 x PMC power2400, RC2 remote)

Pair


Consultar

IB2S-A-CII

3 way standmount in studio black finish
(1 x PMC control1200, 1 x PMC power2400)

Each

Consultar



IB1S-AIII

3 way standmount in studio black finish
(Integrated 600w power amplifier)

Pair

Consultar

IB1S-A-CIII

Dedicated 3 way centre channel speaker for the IB1S-A
(Integrated 600w power amplifier)

Each

Consultar

- Specifiable loudspeaker cable looms are included (max 20m per channel).
- Balanced XLR cables between crossover and power amplifier are included (max 5m).
- A range of dedicated stands are available.
- 12 week expected delivery time.
- MB3, BB6, QB1 Active models include site commissioning by agreement.
- IB2, MB3, BB6, QB1 Active models, and their derivatives require a non-refundable 50% deposit with order.
- A range of dedicated stands is available for all monitors.
- Items subject to change without notice.
- PMC Standard Trading Terms & Conditions apply.

Professional series – passive monitors

EURO RETAIL INC VAT 06/20

PMC[®]

€ Retail
Inc. VAT



DB1 Gold

2 way standmount in studio black finish / jet black veneer


Pair Consultar

TUBE-104 Studio stands (104cm 41")

Pair Consultar

BRKT-DB1 Multi angle wall brackets

Pair Consultar



IB1S

3 way standmount in studio black finish

Pair Consultar


STD-IB1-33 high mass studio stands for IB1S (33")

Pair Consultar

IB1SM-C

Dedicated 3 way centre channel speaker for the IB1S

Each Consultar



IB2S

3 way standmount in studio black finish

Pair Consultar

STD-IB1-33 high mass studio stands for IB1S (33")

Pair Consultar


IB2S-C

Dedicated 3 way centre channel speaker for the IB2S

Each Consultar

06/2020 EURO RETAIL INC VAT

€ Retail
Inc. VAT



MB2S

3 way standmount in studio black finish

Pair

Consultar

STD-MB2-34 high mass studio stand (86cm 34")

Pair

Consultar

MB2S XBD

3 way floorstander in studio black finish

Pair

Consultar

MB2S-C

Dedicated 3 way centre channel for the MB2S

Each

Consultar




MB2S XBD

Professional series - active subwoofers

EURO RETAIL INC VAT 06/20

PMC[®]

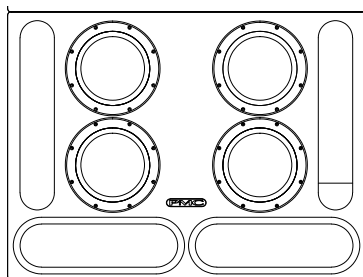

QB1-A SUB

Subwoofer including amplification
(2 x PMC power2400)

Each

Consultar

- Subject to change without notice.
- PMC Standard Trading Terms & Conditions apply.
- Errors and omissions excepted.

QB1-A Sub specific

- Specifiable loudspeaker cable looms are included (max 20m).

Active Studio Monitors

EURO RETAIL INC. VAT - 09/21

PMC[®]

€ Retail
Inc. VAT




PMC 6

Active 2 way monitor with a 6.5 inch bass unit.
H 400mm x W 215mm x D 350mm (cabinet) (+22mm for controls)

Pair

Consultar




PMC 6-2

Active 3 way monitor with 2 x 6.5 inch bass units and
55mm Soft dome mid-range.
H 400mm x W 430mm x D 350mm (cabinet) (+22mm for controls)

Pair

Consultar



PMC 8-2

Active 3 way monitor with 2 x 8 inch bass units and
55mm Soft dome mid-range.
H 534mm x W 551mm x D 415mm (cabinet) (+25mm for controls)

Pair

Consultar




PMC 8 SUB

Active sub with 1 x 8 inch bass unit for use as dedicated sub or
to complete a PMC6 XBD system.
H 266mm x W 551mm x D 415mm (cabinet) (+25mm for controls)

Each

Consultar




PMC 8-2 SUB-L

Active sub with 2 x 8 inch bass units for use as dedicated sub or
to complete the **Left channel** of a 6-2 or 8-2 XBD system.
H 534mm x W 551mm x D 415mm (cabinet) (+25mm for controls)

Each

Consultar



PMC 8-2 SUB-R

Active sub with 2 x 8 inch bass units for use as dedicated sub or
to complete the **Right channel** of a 6-2 or 8-2 XBD system.
H 534mm x W 551mm x D 415mm (cabinet) (+25mm for controls)


Each

Consultar


XBD SYSTEM CONFIGURATIONS



PMC 6-XBD



PMC 6-2-XBD




PMC 8-2-XBD

Active Studio Monitors – Accessories

EURO RETAIL INC. VAT - 09/21

PMC[®]

€ Retail
Inc VAT




YOKE 18

Ceiling mount for **PMC 6** or **PMC 6-2**
H 320mm x W 452mm x D 60mm

Each

Consultar




PLATES

Set of plates for **PMC 8-2** or **PMC 8-2 XBD** stand
Inc. M8 adjustable feet

Set

Consultar




LEGS 19

Set of 3 tube legs for **PMC 8-2 XBD** stand
Inc. M8 bolts

Set

Consultar




LEGS 40

Set of 3 tube legs for **PMC 8-2** stand
Inc. M8 bolts


Set

Consultar

STAND CONFIGURATIONS

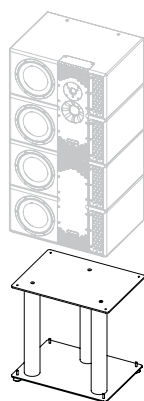

Assembled stand for **PMC 8-2 XBD**
H 529mm + 20mm (min) adjustable feet
W 540mm
D 400mm

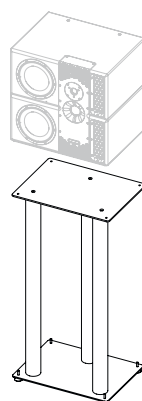

Assembled stand for **PMC 8-2**
H 1063mm + 20mm (min) adjustable feet
W 540mm
D 400mm



control 1200

2-channel power amp
& dsp control



The **control1200** fulfils a dual function at the very heart of PMC's large three-way active systems, the MB3, BB6 and QB1. As a two-channel power amp driving the high-frequency and mid-range drivers on these speakers, it is built to our usual exacting high standards, offering a transparent signal path and astounding resolution at its output. In this role, the hand-built 3U rackmount **control1200** delivers 550Wrms and 275Wrms of effortless power to the mid-range and HF drivers respectively.

The unit also houses the DSP needed to manage our large active systems, providing driver optimisation, non-invasive protection, excursion limiting, amplifier gain control and shelving EQ, plus a three-way 24dB-per-octave filtered crossover with contouring,

all by means of the very latest in cutting-edge algorithms and processing. A dedicated low-frequency balanced line-level output is provided to feed the **power2400** LF power amplifier.

Accepting 115/230V mains power, the **control1200** is extremely efficient, with a rating of 84%, and is perfect for low-noise environments. The unit accepts balanced analogue and AES digital audio at rates of up to 24-bit/192kHz via high-quality Neutrik XLRs, allowing for great flexibility. The high-frequency and mid-range speaker output connection is on a Neutrik NL8, and for those incorporating the unit into a surround configuration, there is also a balanced analogue and digital LFE in/throughput facility.

ATL™
Advanced Transmission Line

PMC®
www.pmc-speakers.com



Specifications

Power output @1%THD
(Analogue input sensitivity at +12.5dB)

HF 279W@10kHz into 8 Ohms
MF 650W @1kHz into 8 Ohms

THD+N

HF 0.004% @10kHz 10W into 8 Ohms
MF 0.01% @1kHz 10W into 8 Ohms

Frequency response

HF 4500Hz-45kHz -3dB
MF 450hz-3.3kHz -3dB

Input impedance

20k Bal

Input sensitivity

Adjustable +4 to +20dBu

Heat dissipation

253 BTU/hr @ 1/8th rated power

Mains connection

IEC C14 3 pole inlet-115V/230V (switchable)

Power consumption

55W idle 199W at 1/8th rated power

Dimensions

H 133mm x **W** 482mm x **D** 470mm

Weight

11.5kg

subject to change without notice

power 2400

mono power amplifier




The **power2400** mono block power amplifier offers outstanding audio performance with dependability. Its transparency and astounding levels of resolution make it ideal for critical monitoring applications especially in partnership with any one of the PMC three-way passive monitors.

This British, hand built, 3U rack mount amplifier produces a commanding 1200W into 8 ohms with a flat frequency curve under all loads. Its intelligent single feedback loop circuit senses the loudspeaker's load and adjusts the response accordingly and creates an extremely low output impedance. With this in mind you are not only guaranteed a highly accurate balance but also remarkable dynamics and control over all the monitor's drivers.

Both power supply and amplifier are highly efficient with the amplifier delivering 84% efficiency reducing current usage

and both exhibit extremely low radiated and conducted EMI - perfect for low noise environments. Globetrotting presents no problem as the mains input is switchable from 115V or 230V-240V with the output connections via substantial binding posts and audio input is via a high quality Neutrik, XLR socket.

power2400 is ideal for use with the following passive monitors:

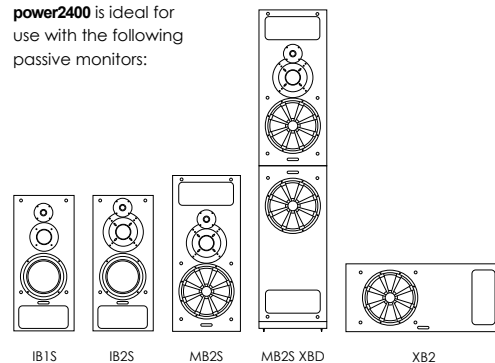

ATL™
Advanced Transmission Line

PMC®
www.pmc-speakers.com



Specifications

Power output @1%THD	1200W into 8Ω 2400W into 4Ω
THD+N	0.008% at 1kHz, 10W, into 8Ω
THD+N typical	0.013% at 20Hz - 20kHz, 10W into 8Ω
Frequency response	10Hz - 50kHz -3dB
Damping factor	160 (20Hz - 20kHz) ref 8Ω
Input impedance	100kΩ
Voltage gain	34dB
Sensitivity	1.95Vrms for rated output power
Heat dissipation	368BTU per hour at 1/8 th rated power into 8Ω
Dynamic range	119dB relative to rated output power into 8Ω
Mains connection	IEC C20 3 pole - 115v or 230-240v (switchable)
Power consumption	60W - idle
Dimensions	H 133mm x W 482mm x D 470mm
Weight	14.5kg

subject to change without notice